

Department of Environmental Services 414 Andrews Street Rochester, New York 14604-1493 www.cityofrochester.gov

August 17, 2015

ADDENDUM	NO.	THREE
-----------------	-----	--------------

PROJECT TITLE:

Pubic Market Renovation and Expansion

PROJECT NO.:

10064

Invitation to Bid No.

C04360

Instruction to Bidders:

- 1. MODIFY the Contract Documents and/or Drawings as set forth in the attached addendum 3 pages.
- 2. **SIGN** this Addendum below acknowledging receipt and understanding, **INSERT** it in the bidding document, and **RETURN** it with your bid.

Date of bid opening is hereby changed to August 25, 2015, same time and place.

CITY OF ROCHESTER Holly Barrett, P.E. Assistant City Engineer	CITY OF ROCHESTER Lands Such Y Charles Zettek, Jr. Purchasing Agent
The undersigned bidder acknowledges reconstruction of the undersigned bidder acknowledges ac	eipt and understanding of ADDENDUM NO. 3. Name of Company
	Authorized Signature

G:\PROJ\ARCH\2010\10064 Public Market Renovation\ADDENDUM No. 3 8.10,2015.doc

(4)

Phone: 585,428,6845

Fax: 585.428.6004

TTY: 585,428,6054

EEO/ADA Employer



engineers | planners | scientists

City of Rochester Public Market Renovation and Expansion

Addendum 3 August 17, 2015

TO THE DRAWINGS:

1.	DMP 111	On Shed D Plumbing Plan, delete horizontal gas heater flue piping. Each unit heater to be provided with individual vertical flue and B vent termination through roof.
2.	DA 131	On Shed D Roof Plan, to the callouts "4" flue through roof. See Mechanical Drawings" Add: "Typical for 7 locations"
3.	DA 301	On the Transverse Wall section, to the callout "Vent penetration at roof after heating System is removed" add: "Typical 7 locations"
4.	DA 201	To the Door Schedule, in the Notes for Shed D Slider, revise quantity to 24, revise Hardware set for Door 001A to be #15, Door 001A to be frame HM4 and door HMD per Drawing SK-A01. Required quantity for Door 001A is 4.
5.	DE 101	To Electrical Site Lighting Plan revise per drawing SK-E01
6.	BE 101	To Electrical Site Lighting Plan revise per drawing SK-E02
7.	BE 501	To Panel Schedule MDP-1 revise per drawing SK-E03
8.	BE 503	To One Line Diagram revise per drawing SK-E04
9.	BS 501	To Detail 4, revise foundation wall insulation to read: "Rigid Insulation Board R10"
10.	BP 111	To Shed B Plumbing Plan, revise per drawing SK-P01
11.	BP 501	To Plumbing Fixture Schedule, revise follows: change designation FS-1 to be JS-1, change designation FS-2 to be FS-1, change designation SK-1 to be FS-2
12.	DMP 501	To Unit Heater Schedule Gas (Shed D) Replace discontinued basis of design unit heater to be: Lennox model LF24-100 including the following accessories:

- LB-85397 LPG Conversion Kit
- WR-1C20-102 Thermostat
- LB 69472-LF24 Hanging Bracket Kit

TO THE SPECIFICATIONS:

1. Section 087100 DOOR HARDWARE

Add "Aluminum Threshold, National Guard Products #NGP 828" to Hardware Set #9

2. Section 101400 INTERIOR SIGNAGE

To Products, Panel Sign Types, add "Provide Panel Signs in sizes indicated, or in closest match in manufacturer's standard size"


3. Section 220533 PLUMBING HEAT TRACE


Delete in entirety

CLARIFICATIONS:

The following clarifications provide answers to questions that have been received from bidders, which have not been otherwise addressed in this Addendum:


1. All Plumbing and HVAC work within the Food Vendor Kiosks are in the scope of Section 134225 including connections to utilities.

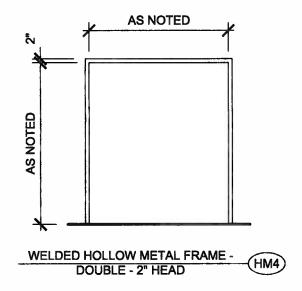

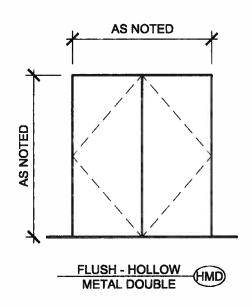


DOOR & DOOR FRAME ELEVATIONS SCALE: 1/4"=1'-0"

	DRAWING TITLE:	PROJECT NO.:	PROJ. MGR.:
TY-LININTERNATIONAL 255 EAST AVENUE ROCHESTER, NY 14804 (585) 512-2000	DOOR & DOOR FRAME ELEVATIONS	435346.01	THC
		DATE:	DRWN. BY:
	PROJECT NAME:	08/17/2015	TJH
	ROCHESTER PUBLIC MARKET	SCALE:	CHKD. BY:
		AS NOTED	THC
	CITY OF ROCHESTER	DRAWING NO: SK-A	01
	30 CHURCH STREET, ROCHESTER, NY 14814	SN-P	101

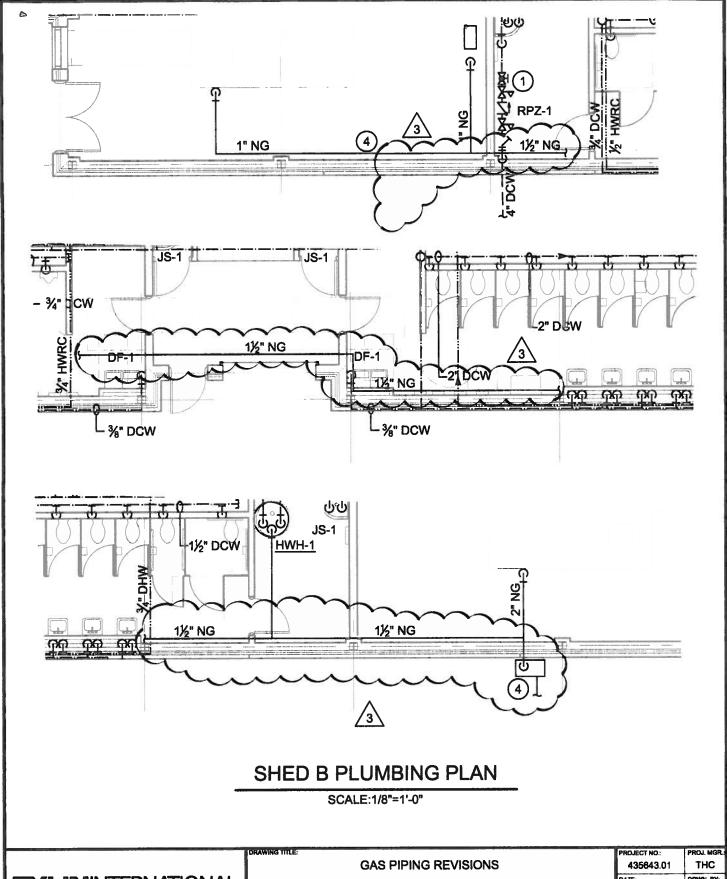

TY'LIN INTERNATIONAL DRWN. BY: DATE: PROJECT NAME 8.13.15 HAJ **ROCHESTER PUBLIC MARKET** SCALE: CHKD. BY: AS SHOWN **JBF** 255 EAST AVENUE CLIENT: ROCHESTER, NY 14604 ROCHESTER PUBLIC MARKET (585) 512-2000 SK-P01 30 CHURCH STREET ROCHESTER, NY 14814

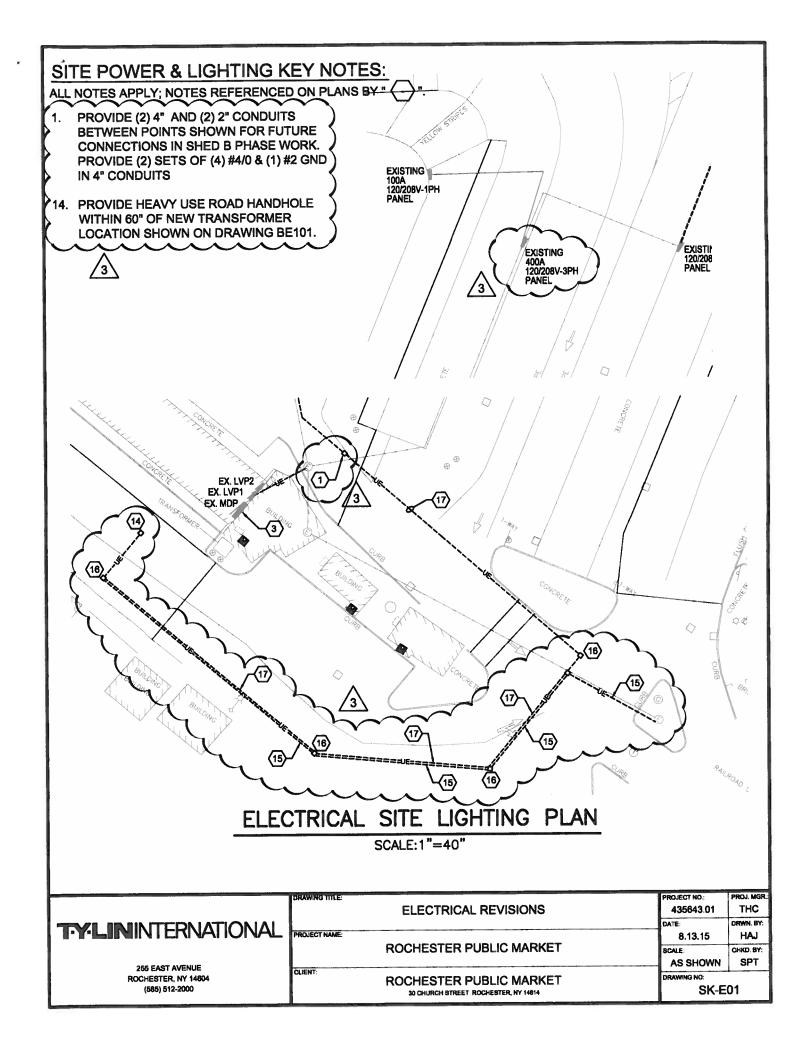




- 1. DISCONNECT OVERHEAD ELECTRICAL SERVICE TO BUILDINGS.
- 2. WHEN DEMO BEGINS, LOCKOUT AND TAG ALL SOLAR DISCONNECTS.




KEY NOTES:

ALL NOTES APPLY; NOTES REFERENCED ON PLANS BY " (-)".

8. WHEN MANHOLE IS REMOVED, RE-ROUTE SHED A CONDUIT TO HAND HOLE. CONNECT SHED A FEEDERS TO CONDUCTORS INSTALLED PER DE101 KEY NOTE 1.

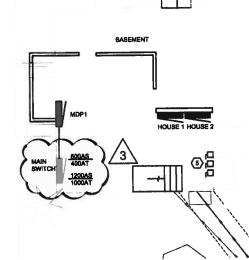

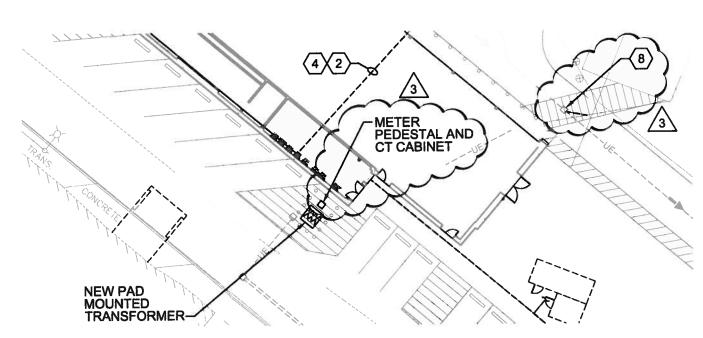

<u>/</u>3\

ELECTRICAL SITE LIGHTING PLAN

SCALE:N.T.S.

TY:LININTERNATIONAL

255 EAST AVENUE ROCHESTER, NY 14604 (585) 512-2000

DRAWING TITLE:	ELECTRICAL REVISIONS	PROJECT NO.: 435643.01	PROJ. MGR.	
	ELECTRICAL REVISIONS	DATE:	DRWN. BY:	
PROJECT NAME:	ROCHESTER PUBLIC MARKET	8.13.15	HAJ	
		BCALE: AS SHOWN	CHKD. BY: SPT	
CLIENT:	ROCHESTER PUBLIC MARKET 30 CHURCH STREET ROCHESTER, NY 14614	DRAWING NO: SK-E	DRAWING NO: SK-E02	

TY'LININTERNATIONAL

ø

255 EAST AVENUE ROCHESTER, NY 14804 (685) 512-2000

DRAWING TITLE:		PROJECT NO:	PROJ. MGR.:	
	SCHEDULE REVISIONS	435643.01	THC	
		DATE:	DRWN. BY:	
PROJECT NAME:		8.13.15	HAJ	
	ROCHESTER PUBLIC MARKET	SCALE:	CHKD. BY:	
		AS SHOWN	SPT	
CLIENT:	ROCHESTER PUBLIC MARKET 30 CHURCH STREET ROCHESTER, NY 14814	DRAWING NO: SK-E	DRAWING NO: SK-E03	

